

# Hand pumps JP and hydraulic hoses JS

Light and powerful



JPA 5



JP 26

## Uses and applications for hand pumps


Jacks		JP 26
JH 5 G plus	2x	2x
JH 10 G plus	2x	2x
JH 15 G plus	1x	2x
JH 20 G plus	1x	2x
JHS 5	2x	2x
JHS 10	1x	2x
JHS 10 ku	2x	2x
JH 13 P	2x	2x
JH 30 P	-	1x
JH 50 P	-	-

## Hydraulic hand pumps without hoses

Type		JP 26
Oil volume complete/usable	L	2.1 / 2.0
Working pressure	bar / psi	520 / 7540 psi
Connections	pcs	2
Dimensions L x W x H	mm / in	848 x 210** x 169 / 33.3 x 8.3 x 6.6"
Length of hoses	mm / in	variable*
Weight with oil on cart	kg / lbs	14.6 / 32.4
<b>Order number</b>		<b>02 260 000-P</b>

\*available up to 15 000 mm \*\*Wide foot plate

## Suitable high pressure hydraulic hoses for all of our manual and electric pumps

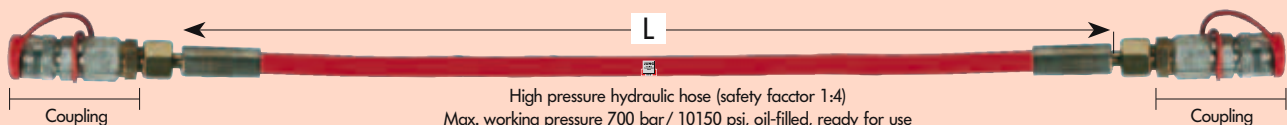

Hose type		JS 2	JS 3	JS 4	JS 6	JS 15
Drip free couplings	no.	2	2	2	2	2
Length	L=mm / in	2 000 / 78.7"	3 000 / 118.1"	4 000 / 157.5"	6 000 / 236.2"	variable*
<b>Order number</b>		<b>15 200 002-0</b>	<b>15 300 002-0</b>	<b>15 400 002-0</b>	<b>15 600 002-0</b>	<b>15.....00-0**</b>

\*available up to 15 000 mm

\*\*.....enter L in mm

## Recommended for use with two hydraulic jacks

### Advantages in detail

- Sturdy construction, yet lightweight and easy to handle.
- Pressure limiting valve provides safety against overloading.
- Optimally compatible with our hydraulic jacks.
- Pumps are equipped with integrated quick-lift for faster working.

## Electrical pumps without hoses

Type		JPA 5
Oil volume	L	1,0 / 1,0
Working pressure	bar	520
Connections	pcs	1*
Flow rate high pressure	h / min	1.9 - 30 bar
Flow rate high pressure	h / min	0.1 - 520 bar
Motor facts		12 V DC
Dimensions L x W x H	mm / in	330 x 197 x 203 / 13 x 7.8 x 8"
Length of hoses	mm / in	variable
Weight with oil	kg / lbs	9,1 / 20
<b>Order number</b>		<b>03 102 000-E</b>

\*2 connections as option available

### JPA 5 Standard version


with 1 hydraulic connection. Accessories including rechargeable battery with carrying case and cable available under order number 03 102 002-E.

# Electrical hydraulic pumps JPA and JPE

*Powerful and quick*




**JPE 30 NVR**



**JPE 30/4 NVR**



**JPE 55 NVR**

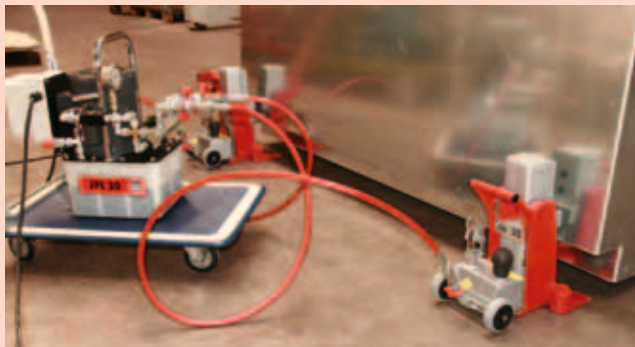

Electric pump JPE 30-NVR with 2 jacks in operation

▶ See pages 4-6 and 8 for suitable jacks.

## Advantages in detail



- Quick connectors with drip free rapid closure valves.
- One oil circuit capable of supplying two hydraulic jacks.
- Easy handling.
- Maximum safety during operation through cable remote control.
- Sturdy two stage electric pumps available in different versions.
- Easily controllable: JPE 30-NVR now with precision lowering regulator.
- Includes transport cart for easy and safe transport.

Recommendation: When lifting one side of a load with 2 jacks use external manual pump type JP16/26 (see page 9), electrical pump type JPE 30 NVR or battery pump JPA 5.

### Electrical pumps without hoses

Type		JPE 30 NVR	JPE 30/4 NVR	JPE 55 NVR
Oil volume	L	7.6 / 4.8	7.6 / 4.8	9.5 / 8.4
Working pressure	bar	520	520	520
Connections	pcs	2	4	2
Flow rate high pressure	h / min	3.9 - 7 bar	3.9 - 7 bar	7.1 - 50 bar
Flow rate high pressure	h / min	0.33 - 520 bar	0.33 - 520 bar	0.95 - 520 bar
Motor facts		230 V, 50 Hz	230 V, 50 Hz	230 V, 50 Hz
Dimensions L x W x H	mm / in	530 x 300 x 560 / 20.8 x 11.8 x 22"	530 x 300 x 610 / 20.8 x 11.8 x 23.8"	530 x 300 x 560 / 20.8 x 11.8 x 22"
Length of hoses	mm / in	variable	variable	variable
Weight with oil and cart	kg / lbs	40 / 88	450 / 99	40 / 88
Usable jacks		any hydraulic jacks	any hydraulic jacks	any hydraulic jacks
Order number		03 300 200-EU	03 300 004-EU	03 550 200-E

#### JPE 30 NVR

##### Standard version

with 1 hydraulic connection. Accessories including rechargeable battery with carrying case and cable available under order number 03 102 002-E.

#### JPE 30/4 NVR

##### Extended version

Equipped with connection block JNB 2-E, with lowering speed control valve and 4 x JNB 1-E. Other versions available on request.

#### JPE 55 NVR

##### Standard version

Equipped with 2 hydraulic connection nipples, 1 manometer and precision lowering control.

Other options on request available.