


# Revolving transport trolley JKB

For loads up to 15 metric tons

**NEW**



**JKB 7,5**

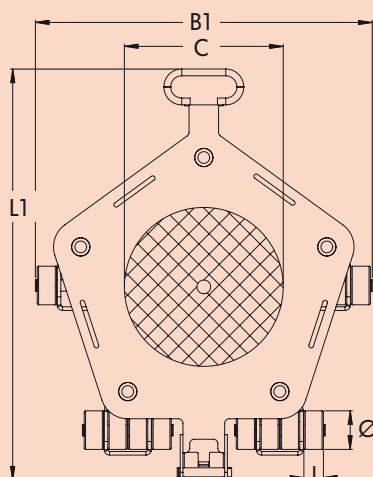

**Sketch JKB 7,5**

## Advantages in detail

- Optional connecting bars can be fixed without tools by clamping down on handle.
- High load capacity at low weight.
- Bearing supported swivelling rollers allow 360° maneuverability.
- Same height trolleys provide interchangeability. Mix and match revolving trolleys with K-Series transport trolleys.
- All products in a set also available with accessories listed on page 31.
- Unrivalled: The double roller system reduces rolling and turning resistance to a minimum.
- Using the slits in the platform the trolleys JKB 3-7,5 can be affixed to the load with standard tiedown belts.
- In addition, all the trolleys are outfitted with a platform center hole to allow attachment to the load.
- For choosing the adequate revolving trolley we recommend a load of two-third of the maximum capacity. This will be the most advantageous compromise between load, ergonomic and handling of the equipment.

► Please see page 31 for compatible connecting bars and pulling handles

Load weight up to			7,5 metric to	15 metric to
Type	Sketch		JKB 7,5 K	JKB 7,5 Set
composed of			1 x JKB 7,5 K	2 x JKB 7,5 K
Load capacity		kg / lbs	7 500 / 16 500	15 000 / 33 000
Number of Castors		pcs	20	2 x 20
Castor dimensions	Ø x l	mm / in	85 x 43 / 3.3 x 1.7"	85 x 43 / 3.3 x 1.7"
Fitting height		mm / in	110 / 4.3"	110 / 4.3"
Supporting Surface of turnable	Ø C	mm / in	250 / 9.8"	250 / 9.8"
Cassette dimensions	L1 x B1	mm / in	910 x 660 / 35.8 x 26.0"	910 x 660 / 35.8 x 26.0"
Weight with JUWAmid		kg / lbs	63,5 / 140	127 / 280
Order number with JUWAmid			14 075 085-P	14 075 085-D